



XT Series - Semi-traction batteries with a paste plate

# **XT 145**

### **BASIC INFORMATION**

MODEL XT 145 VOLTAGE 6V

CAPACITY 260Ah @ 20Hr

HOUSING MATERIALY Polypropylene
BATTERY TYPE Semi-Traction

**ELECTROLYTE** With liquid electrolyte



#### BATERIE PRZEMYSŁOWE

### **SPECIFICATION**

MODEL	TERMINAL	POLARIZATION	DIMENSIONS			WEIGHT	
XT 145 ET	FT	DIQUE.	LENGTH	WIDTH	HEIGHT	WITH TERMINAL	33,00kg
	ΕI	ET RIGHT +	260mm	180mm	265mm	295mm	

### **ELECTRICAL SPECIFICATIONS**

CAPACITY WHEN DISCHARGED UP TO 1.75V / CELL AT 25°C		CHARGING VOLTAGE DURING CYCLE OPERATION	CHARGING CURRENT	
5h	20h	25°C	RECOMMENDED	MAXIMUM
215Ah	260Ah	7,50V	26,00A	33,80A
"Do not install or charge the batteries in a sealed compartment."				

### **STORAGE**

PERMISSIBLE	AMBIENT TEMP	PERATURE	SELF-DISCHARGE AT 20°C		
STORAGE	CHARGE	DISCHARGE			
5℃ to +40℃	5°C to +45°C	-10°C to +45°C*	Up to 15% for a month depending on the storage temperature		
* In temperatures below 0°C, maintain the state of charge at least 50%."					

### **CHARGING STATUS**

CHARGE PERCENTAGE	CELL	6 V
100	2,22	6,66
75	2,12	6,36
50	2,07	6,21
25	2,02	6,06
0	1,95	5,85

### **APPLICATIONS**


- wheelchair
- scissor lifts
- golf carts
- cleaning machines
- boats
- photovoltaic systems
- mobile devices
- devices powered by an electric motor
- devices with high cycle of work





XT Series - Semi-traction batteries with a paste plate

## XT 145

### **DIMENSIONS**








### **TERMINAL TYPE**

ET




Terminal height: 33 [mm]

Torque value: 110-120 [Nm]

Screw: 5/16"

### **CYCLICAL LIFE**

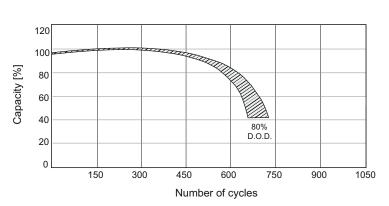

### RECYKLING

### **SAFETY**

















### **ENVIRONMENT INFORMATION**

EXPLOITED BATTERIES ARE CONIDERED AS HAZARDOUS WASTE. THESE WASTES DUE TO THEIR ORIGIN, CHEMICAL COMPOSITION (THEY CONSTAINS HEAVY METALS LIKE LEAD AND OTHER TOXIC SUBSTATIONS) AND OTHER FEATURES MAY BE DANGEROUS FOR ENVIROMENT AND HUMAN OR ANIMAL HEALTH LIFE. ACCORDING TO THE WASTE ACT, WASTE IN THE FORM OF BATTERIES AND ACCUMULATORS SHOULD BE COLLECTED SEPARATELY FROM OTHER TYPES OF WASTE.

IN ORDER TO OBTAIN MORE DETAILED INFORMATION, WE ENCOURAGE YOU TO CONTACT US, WE PROVIDE ANY INFORMATION ON HOW TO HANDLE WITH WASTE BATTERIES AND ACCUMULATORS.