



XT Series - Semi-traction batteries with a paste plate

# **XT890**

### **BASIC INFORMATION**

MODEL XT 890 VOLTAGE 8V

CAPACITY 190Ah @ 20Hr HOUSING MATERIALY Polypropylene

**ELECTROLYTE** With liquid electrolyte

Semi-Traction



#### **SPECIFICATION**

**BATTERY TYPE** 

MODEL	TERMINAL	POLARIZATION	DIMENSIONS			WEIGHT	
XT 890 ET	ET.	LEFT+	LENGTH	WIDTH	HEIGHT	WITH TERMINAL	31,20kg
	EI		262mm	181mm	245mm	278mm	

#### **ELECTRICAL SPECIFICATIONS**

CAPACITY WHEN DISCHARGED UP TO 1.75V / CELL AT 25°C		CHARGING VOLTAGE DURING CYCLE OPERATION	CHARGING CURRENT	
5h	20h	25°C	RECOMMENDED	MAXIMUM
155Ah	190Ah	10,00V	19,00A	24,70A
"Do not install or charge the batteries in a sealed compartment."				

#### **STORAGE**

PERMISSIBLI	E AMBIENT TEMP	PERATURE	SELF-DISCHARGE AT 20°C		
STORAGE	CHARGE	DISCHARGE			
5°C to +40 °C	5°C to +45 °C	-10°C to +45 °C*	Up to 15% for a month depending on the storage temperature		
* In temperatures below 0°C, maintain t	he state of charge at least 50%."				

#### **CHARGING STATUS**

CHARGE PERCENTAGE	CELL	8 V
100	2,22	8,88
75	2,12	8,48
50	2,07	8,28
25	2,02	8,08
0	1,95	7,80

#### **APPLICATIONS**


- wheelchair
- scissor lifts
- golf carts
- cleaning machines
- boats
- photovoltaic systems
- mobile devices
- devices powered by an electric motor
- devices with high cycle of work





XT Series - Semi-traction batteries with a paste plate

## **XT890**

#### **DIMENSIONS**

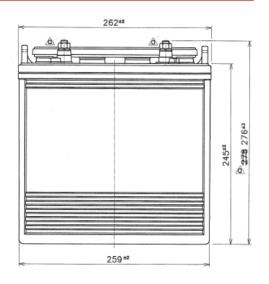


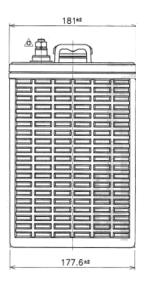

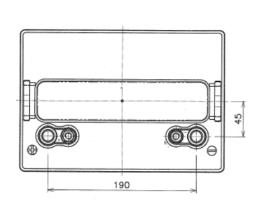

#### **TERMINAL TYPE**

#### ΕT




Terminal height: 33 [mm]

Torque value: 110-120 [Nm]

Screw: 5/16"

#### ......

# CYCLICAL LIFE

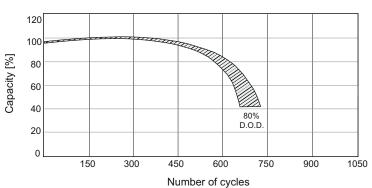

#### SAFETY











### RECYKLING







#### **ENVIRONMENT INFORMATION**

EXPLOITED BATTERIES ARE CONIDERED AS HAZARDOUS WASTE. THESE WASTES DUE TO THEIR ORIGIN, CHEMICAL COMPOSITION (THEY CONSTAINS HEAVY METALS LIKE LEAD AND OTHER TOXIC SUBSTATIONS) AND OTHER FEATURES MAY BE DANGEROUS FOR ENVIROMENT AND HUMAN OR ANIMAL HEALTH LIFE. ACCORDING TO THE WASTE ACT, WASTE IN THE FORM OF BATTERIES AND ACCUMULATORS SHOULD BE COLLECTED SEPARATELY FROM OTHER TYPES OF WASTE.

IN ORDER TO OBTAIN MORE DETAILED INFORMATION, WE ENCOURAGE YOU TO CONTACT US, WE PROVIDE ANY INFORMATION ON HOW TO HANDLE WITH WASTE BATTERIES AND ACCUMULATORS.